

VINCER

SOLENOID VALVE

VINCER VALVE CO.,LTD

Add: Yibaiwan Industrial Park, Dongcheng District,
Dongguan, Guangdong, China


MP: +8613826949015

Tel: 86 0769 22489563

Fax: 86 0769 22487751

www.vincervalve.com

E-mail: sales@vincervalve.com

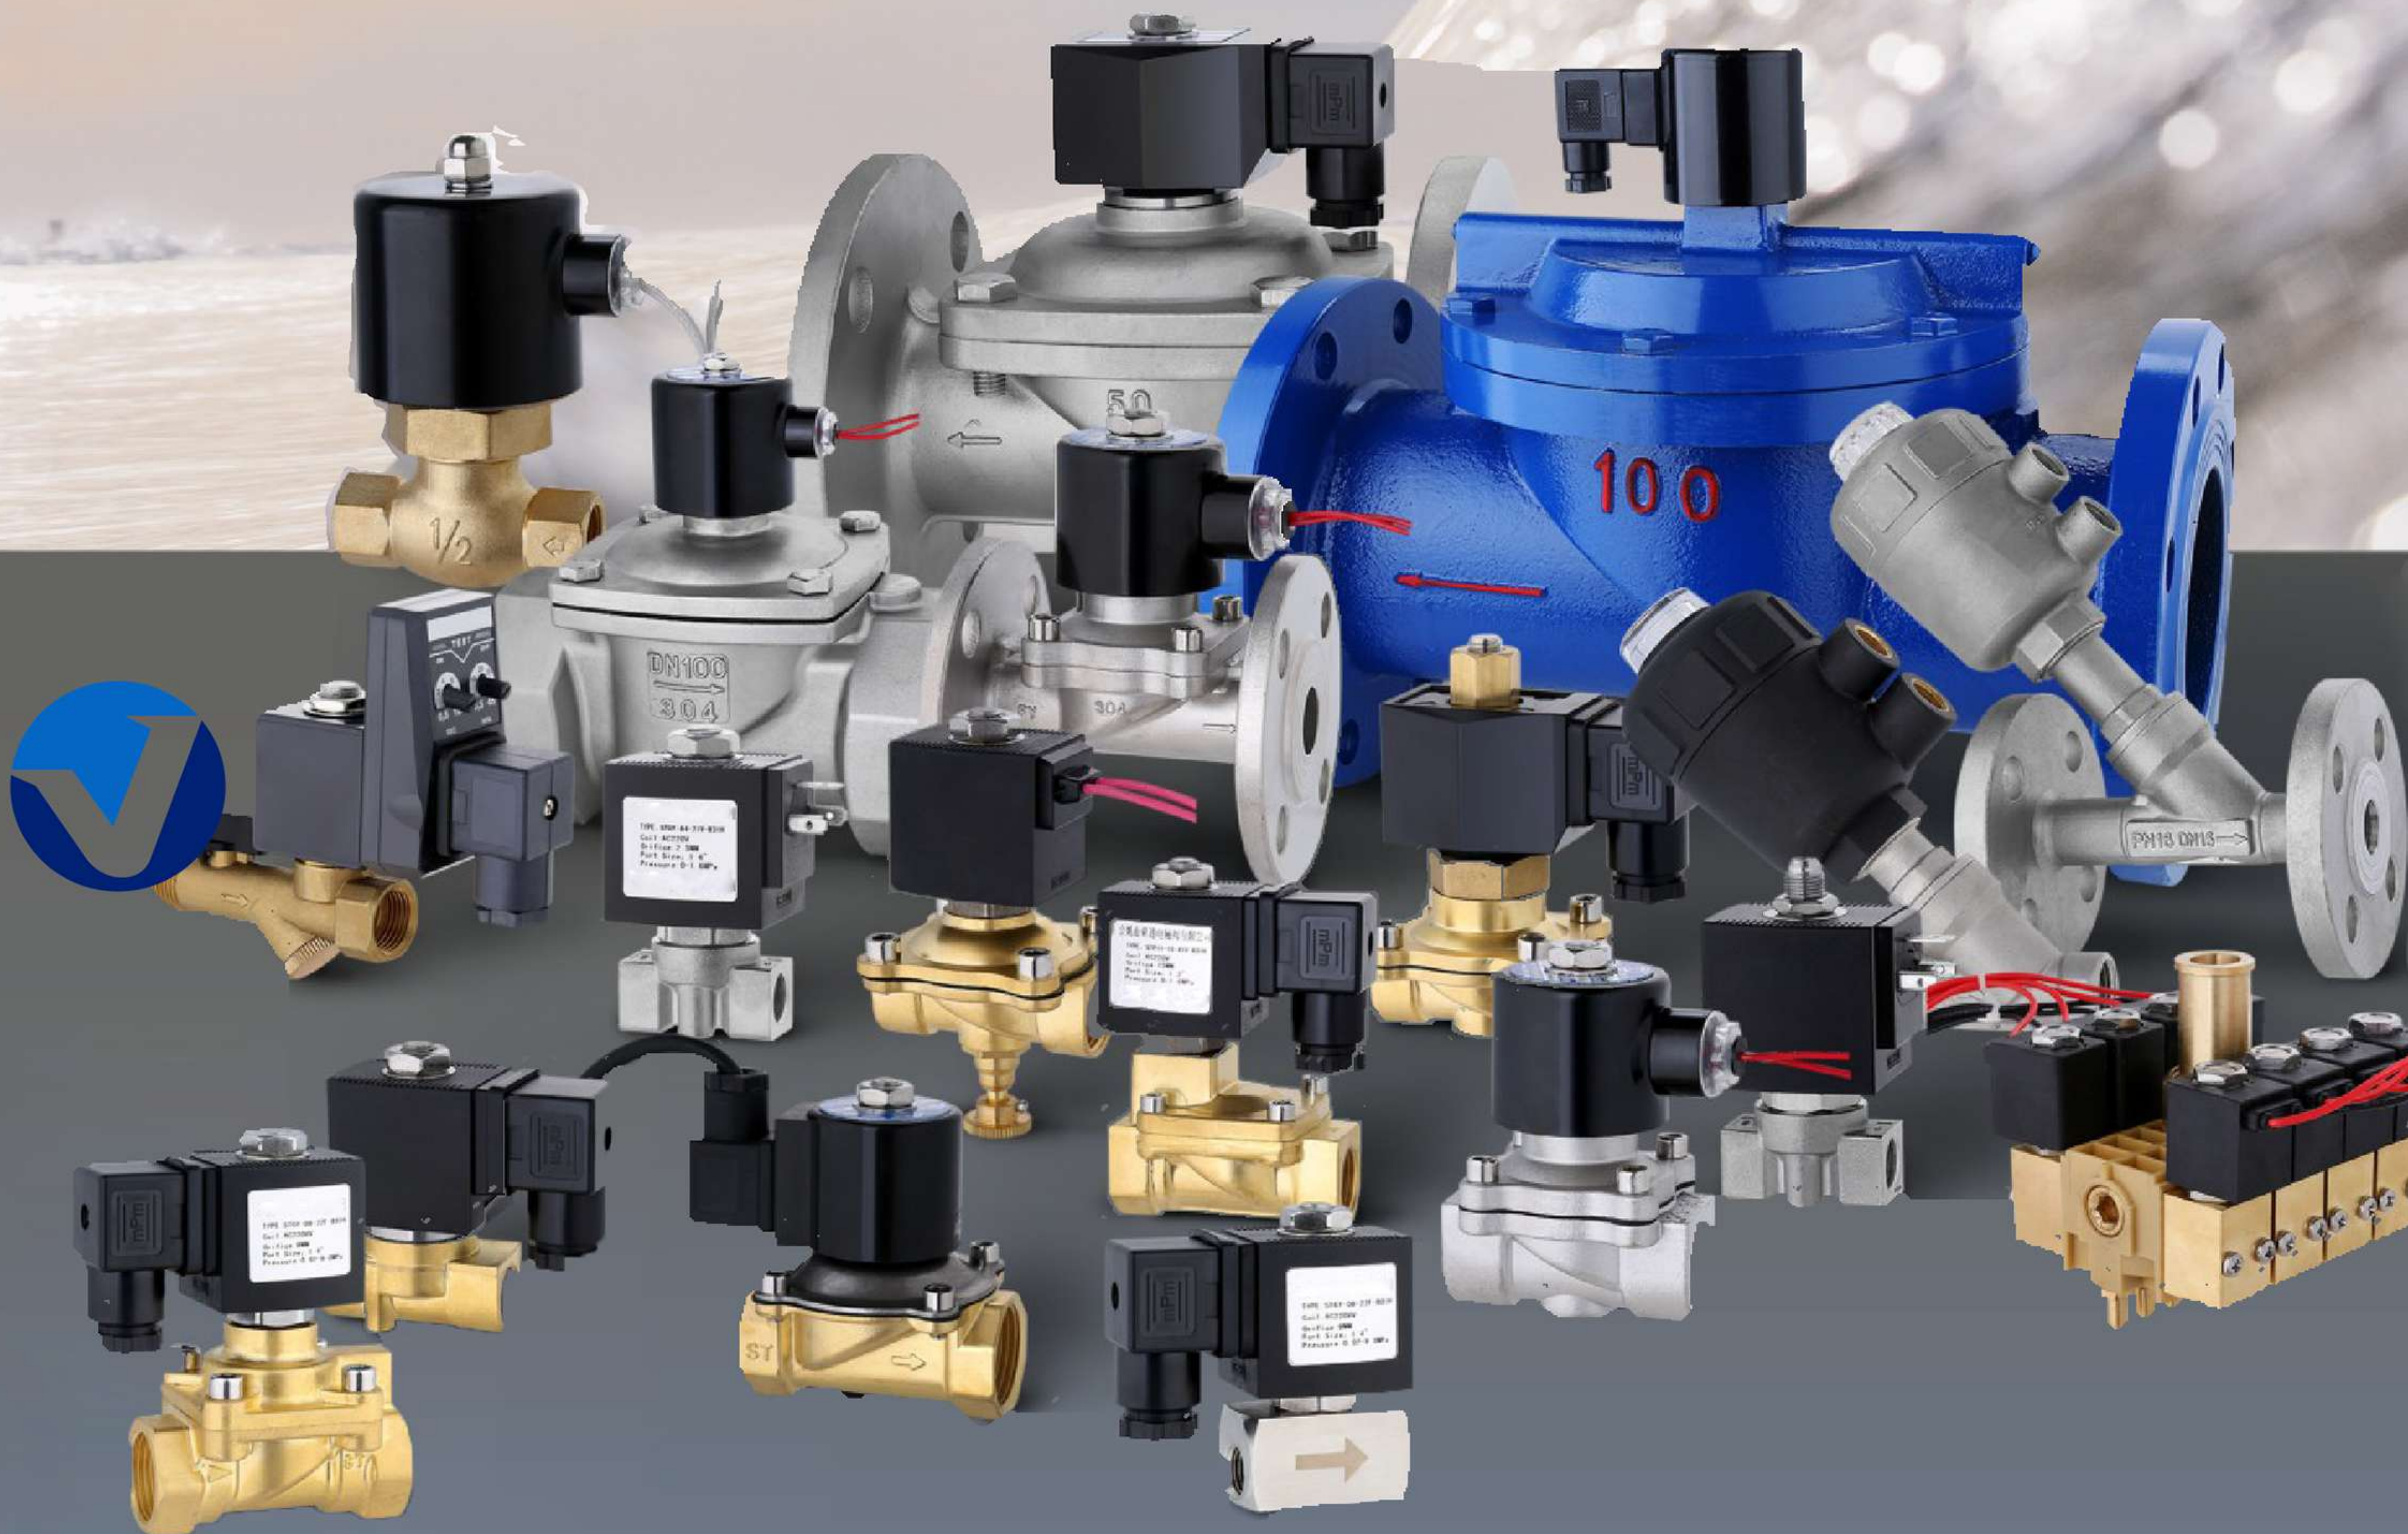

特征 Characteristic	1.高压电磁阀, 先导膜片式结构, 适用于空压机, 注塑机 2.使用PTFE密封件 1. High pressure solenoid valve, pilot diaphragm structure, suitable for air compressor, injection molding machine 2. Use PEEK seals	
介质 Medium	热水, 压缩空气, 水, 油等 Hot water, compressed air, water, oil, etc.	
流体温度 Temperature	-20°C~250°C	
压力 Pressure	0.1MPa~25.0MPa 0.1MPa~35.0MPa 2MPa~50.0MPa	
连接尺寸 Port Size	1/4", 3/8", 1/2"	
连接方式 Port Thread	BSPP螺纹/NPT螺纹 BSPP, NPT	
口径(mm) Orifice	4, 5, 6, 7, 8	
电压 Voltage	DC-12V,24V AC-24V,120V,240V/60Hz,110V,220V/50Hz	
范围 Tolerance	±10%	
线圈 Coils	Y21B,18VA(AC),16W(DC),IP65,100%ED EX1620,20VA(AC),16W(DC),IP65,100%ED	
材料 Material	阀体 Body	不锈钢 Stainless Steel304
	密封件 Seal	聚四氟乙烯/聚醚醚酮/不锈钢 PTFE,PEEK,Stainless Steel 304
	隔磁管 Armature Tube	不锈钢 Stainless Steel 304
	动铁芯 Plunger	不锈钢 Stainless Steel 430F
	静铁芯 Stop	不锈钢 SS 430F
	弹簧 Springs	不锈钢 SS 304
	分磁环 Shading Rings	紫铜 Copper




VSKBB



Y21B

EX1620

型号编制方式 Determine Valve Body Code

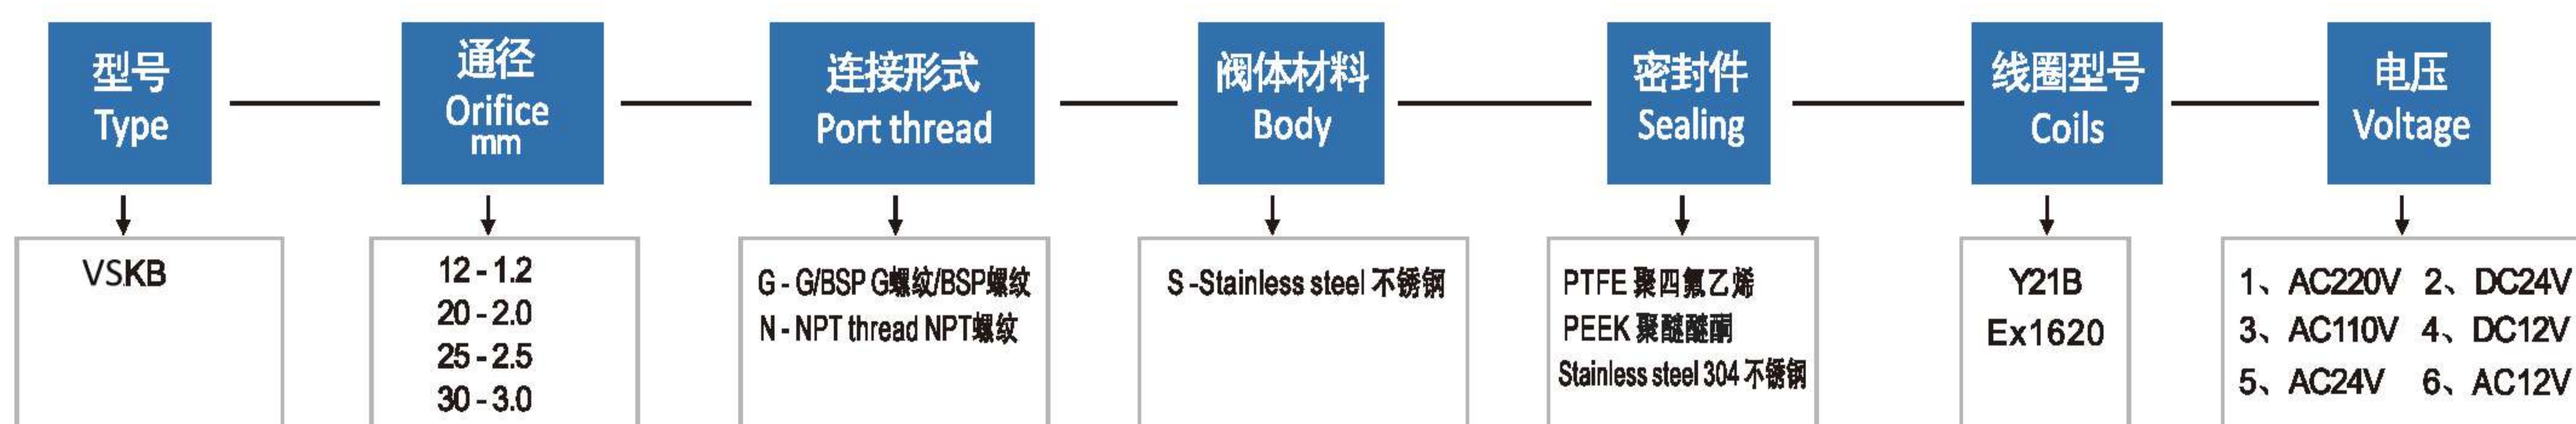

VSKB系列,常闭NC,S91B线圈 (承压: 250kg)

VSKB Series Normally Closed, Y21B Coil (Pressure Range:250bar)

Size	端口大小 Port Size	孔口大小 Orifice/MM	Cv	最小压力 Min Pressure	最大压力 Max Pressure		密封材料 Sealing Material	阀身材料 Body Material	线圈 Coils
					AC(22VA)	DC(17W)			
VSKB-XXX	1/4"	5	7	0.5MPa	25.0MPa	25.0MPa	聚四氟乙烯 PTFE 聚醚醚酮 PEEK Stainless steel 304 不锈钢	不锈钢 stainless steel	Y21B
VSKB-XXX	1/4" 3/8"	6	8	0.5MPa	20.0MPa	20.0MPa			Y21B
VSKB-XXX	1/4" 3/8"	7	8	0.5MPa	15.0MPa	15.0MPa			Y21B
VSKB-XXX	3/8" 1/2"	7	8	0.5MPa	10.0MPa	10.0MPa			Y21B

VSKB系列电磁阀尺寸图 (承压: 250kg)

Size Drawing For VSKB Series Solenoid Valve (Pressure Range:250bar)

Size	A	C
VSKB-1/8"	50	138
VSKB-1/4"	50	138
VSKB-3/8"	57	138
VSKB-1/2"	57	148

